

HARMO HRXf SERIES SMART PROGRAMMING AND LIMITLESS CAPABILITIES

The HRXf Series controller features comprehensive help instructions provided with each screen, manual maneuvering controls for maintenance and provides two-screen views for simultaneous input and output monitoring. The HRXf is password protected to eliminate accidental deletion of mold memories, offers mold data grouping with easy retrieving and editing features and has multilingual capabilities.



Features

- Large format, touch-screen graphic user interface
- Falcon-ED offline programming package
- Global standard open network (DeviceNet equipped)
- On-board mold memory (100 setups)
- Teach-on-the-fly axis speeds (100 setups)
- Standard palletizing feature (99 point per axis)
- First-up reject and quality sampling modes
- Multi-layered password protection
- Traverse beam mounted control cabinet

Options

- Air requirement: 80 PSI
- Power requirements: AC200 ± 20% (50/60Hz) - three phase
- Operator or non-operator side unload
- Two (2) years parts warranty

HARMO HRXf SERIES

SCREEN SHOTS:



Two half-screen views allow simultaneous input and output monitoring




Password protected mold memories eliminate accidental deletion



Multilingual capabilities



Features convenient mold data grouping, with easy retrieving and editing features

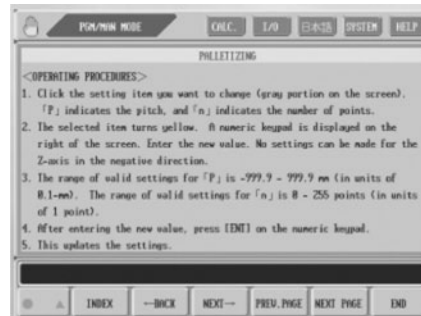

Comprehensive help instructions provided with each screen



Manual maneuvering controls for maintenance